



HEATING AND COOLING SOLUTIONS

LITE
SYSTEMS



Featuring a contoured matte white flat panel design, whisper quiet operations and an easy to use controller.

2.0kW
-10-
7.1kW
CAPACITY RANGE

MODELS

LITE

WALL MOUNTED SPLIT SYSTEM



R32 REFRIGERANT

R32 is the next generation in refrigerants with 66% lower 'Global Warming Potential Factor' than R410A, providing less risk of harm to the environment.



WHISPER QUIET

Daikin's Lite Series is not just compact in size but also quiet in operations, featuring an Indoor Unit Quiet mode that reduces the indoor unit operational noise level down to 19dBA* to maintain room acoustics.



COMPACT SIZE

Utilising a range of new technologies including R32 as a refrigerant, a redesigned indoor heat exchanger with Ø5mm piping and a new large rotor cross-flow indoor fan has resulted in a more compact design for both the indoor and outdoor machines.



ECONOMICAL COMFORT

The Lite Series features up to 4.5 Star Rating energy performance (2.5kW model) in both cooling and heating operations.



LIFESTYLE CONVENIENCE

Features a simplified backlit wireless remote controller with precision temperature set point adjustment in 0.5°C increments and a built-in count up-down ON/OFF timer for convenient set and forget operations.



COANDA AIRFLOW

Discharge louvres are specially designed to stream air upwards along the ceiling for longer throws and delivering rapid cooling and even temperature distribution in the occupied space.

REVERSE
CYCLE



TECHNOLOGY

NEW CROSS FLOW FAN

Large diameter rotor with aerofoil blade design delivers larger volumes of air more quietly than ever before



REDESIGNED HEAT EXCHANGER

Slit type fin design with Ø5mm piping increases heat exchange area for improved capacity output and energy performance

NEW ODM MOTOR

Compact 10 pole DC outer rotor motor delivers higher torque more efficiently

V-CUT WING FAN

With a larger diameter fan and a new V-Cut fan blade design, air volume is increased by up to 18% whilst turbulence is reduced across the surface of the fan for a quiet, more efficient operation



TWIST GRILLE

Grille fins are angled to match the airflow path from the outdoor unit's fan, reducing airflow resistance for quieter operations.



DESIGN EVOLUTION

Incorporating the latest cutting-edge technologies, the Lite Series features a compact modern design, delivering air conditioned comfort more quietly than ever before.

L SERIES: 50 CLASS



SP: 32dBA 340x1050x248

LITE SERIES: 50 CLASS



SP: 28dBA 285x770x223



(OPTIONAL)

WIRED CONTROLLER

COMFORT AT YOUR FINGERTIPS

Daikin's wired controller provides ultimate control of your indoor unit to suit your lifestyle needs. Featuring an intuitive interface for easy operation and a clean minimalist design, it is able to blend seamlessly into your home's decor.

FEATURES

1. Clear, backlit display with easy-to-read text
2. Weekly schedule timer with maximum 5 actions per day
3. Holiday function select the days for which the schedule will be disabled
4. Set temperature limit, to predefine a temperature range for cooling or heating cycle, helping you reduce your energy consumption
5. Off Timer, programmable in 10 minute increments from 30 minutes to 180 minutes



CONTROLLER MODEL NO: BRC073A4



(OPTIONAL)

MOBILE CONTROLLER

WI-FI CONTROL FOR YOUR DAIKIN WALL MOUNTED SPLIT

Mobile Controller puts your air conditioner's frequently used functions at your finger tip with an easy to use app. In conjunction with Daikin's BRP072A42 wireless LAN adaptor, the easy to use Mobile Controller app lets you use your smartphone or tablet to operate your Daikin wall mounted air conditioning unit via Wi-Fi or the internet.

FEATURES

1. Start/stop operation
2. Set operation mode: Auto/Cool/Heat/Fan/Dry
3. Set temperature operation
4. Show room temperature
5. Show outdoor temperature
6. Error notification
7. Set weekly schedule



The Mobile Controller app is available for download, free from the Apple App Store or Google Play.

Note:

- i. Additional wiring adaptor required for compatibility with BRC073A4 (25-50 Class: BRF067A42 & 60-71 Class: BRF080B42)
- ii. Wireless LAN Adaptor (Mobile Controller, BRP072A42) CANNOT be used in conjunction with BRC073A4

Note:

- i. Additional wiring adaptor required for compatibility with BRP072A42 (25-50 Class: BRF067A42 & 60-71 Class: BRF080B42)
- ii. Mobile Controller CANNOT be used in conjunction with BRC073A4 (Wired Controller)

If you're after air conditioning for two separate rooms, Daikin Multi Lite is the smart choice. It takes only one outdoor unit to maintain comfort in both rooms.

7.0kW

CAPACITY RANGE

MODEL


MULTI LITE

2-PORT MULTI SPLIT SYSTEM



REVERSE
CYCLE

CAPACITY BOOST FEATURE

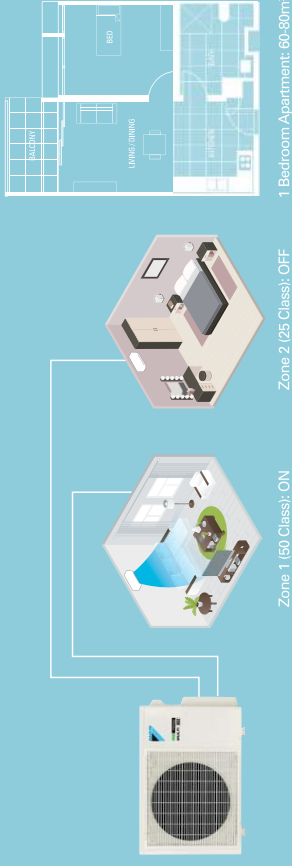

If only one indoor unit is in operation, a boost in capacity (50 Class: up to 7%) will automatically be concentrated into the operating indoor unit allowing for rapid cooling/heating of the zone.



R32 REFRIGERANT

R32 is the next generation in refrigerants with 66% lower 'Global Warming Potential Factor' than R410A, providing less risk of harm to the environment.



LITE SERIES INDOORS

Indoor unit design is based on the Lite Series split system, harnessing all features and specifications and available in 20, 25, 35 and 50 Class models.



ENERGY EFFICIENT

With simultaneous operation of both indoor units, Multi Lite is still able to achieve EERs of up to 3.72 & COPs of up to 4.67 (25 & 50 Class indoor unit combination).



CONNECTABILITY

Up to two wall mounted indoor units can be connected to Multi Lite with a maximum combination of 25 + 50 Class.



INDIVIDUAL COMFORT

Each indoor unit can be individually controlled, scheduled and set to the desired room temperature ensuring optimal comfort for all occupants in the household at anytime.*



OPTIONAL WI-FI CONTROL

Each indoor unit can be fitted with Daikin's optional Mobile Controller (BRP072A42) allowing you to control your system from anywhere, anytime.

INDOOR COMBINATIONS

OUTDOOR UNIT	INDOOR UNIT COMBINATION (CLASS)	COOLING				HEATING			
		EACH CAPACITY (KW)		TOTAL CAPACITY (KW)		EACH CAPACITY (KW)		TOTAL CAPACITY (KW)	
		ROOM A	ROOM B	RATED (MIN-MAX)	EER	ROOM A	ROOM B	RATED (MIN-MAX)	COP
2MXF70VMMA	20	2.00	-	2.00(1.40-3.48)	4.35	2.40	-	2.40(1.30-3.58)	3.93
	25	2.50	-	2.50(1.40-3.48)	4.24	3.00	-	3.00(1.30-3.58)	3.95
	35	3.50	-	3.50(1.50-4.59)	3.85	3.70	-	3.70(1.30-4.45)	4.20
	50	5.00	-	5.00(1.50-5.91)	3.85	5.20	-	5.20(1.30-6.06)	4.37
	20+20	2.00	2.00	4.00(1.60-5.30)	4.49	2.10	2.10	4.20(1.50-5.25)	4.62
	20+25	2.00	2.50	4.50(1.60-6.00)	4.21	2.09	2.61	4.70(1.50-6.18)	4.52
	20+35	2.00	3.50	5.50(1.60-6.47)	3.72	2.05	3.60	5.65(1.50-6.71)	4.59
	20+50	2.00	5.00	7.00(1.60-7.50)	3.72	2.00	5.00	7.00(1.50-8.00)	4.67
	25+25	2.50	2.50	5.00(1.60-6.00)	3.97	2.60	2.60	5.20(1.50-6.18)	4.37
	25+35	2.50	3.50	6.00(1.60-6.91)	3.53	2.54	3.56	6.10(1.50-7.16)	4.45
	25+50	2.33	4.67	7.00(1.60-7.50)	3.72	2.33	4.67	7.00(1.50-8.00)	4.67
	35+35	3.50	3.50	7.00(1.60-7.27)	3.50	3.50	3.50	7.00(1.50-8.00)	4.49

*User can select the unit to operate in either cooling or heating mode, not both cooling and heating simultaneously



INDOOR UNIT	FTX620TUMA	FTX625TUMA	FTX635TUMA	FTX645TUMA	FTX650TUMA	FTX660TUMA	FTX671TUMA
OUTDOOR UNIT	RXF620TUMA	RXF625TUMA	RXF635TUMA	RXF645TUMA	RXF650TUMA	RXF660TUMA	RXF671TUMA
Rated Capacity	Cool (kW) Heat (kW)	2.0 2.5	3.5 3.7	4.6 4.7	5.0 5.2	6.0 6.5	7.1 8.0
Capacity Range	Cool (kW) Heat (kW)	0.9/2.3 0.9/2.7	0.9/2.8 0.9/3.2	1.5/5.0 1.0/5.4	1.5/5.5 1.0/6.0	1.6/6.5 1.0/6.7	2.0/7.5 2.0/8.0
Indoor Airflow Rate (H)	Cool (l/s) Heat (l/s)	152 160	173 188	200 203	210 213	313 333	350 350
Indoor Fan Speeds		5 steps, quiet and automatic					
Energy Label/Star Ratings	Cool Heat	3 3.5	4.5 4.5	3 4	2.5 2.5	2 2.5	2 2.5
Front Panel Colour		Pearl Pure White					
Power Supply		1 phase, 220-240V, 50Hz					
Power Input (Rated)	Cool (kW) Heat (kW)	0.51 0.59	0.53 0.63	0.91 0.86	1.28 1.25	1.44 1.44	1.71 1.73
E.E.R./C.O.P	Cool/Heat	3.92/4.24	4.72/4.76	3.85/4.30	3.59/3.76	3.47/3.61	3.51/3.76
A.E.E.R./A.C.O.P	Cool/Heat	3.87/4.19	4.66/4.71	3.82/4.27	3.58/3.74	3.46/3.59	3.49/3.74
Dimensions (HxWxD)	Indoor (mm) Outdoor (mm) Indoor (kg) Outdoor (kg)	285x770x223		550x675x284		595x845x300	695x930x350
Weight	Indoor (kg) Outdoor (kg)	9 27	9 28	9 28	9 41	9 41	12 41
Compressor Type		Hermetically Sealed Swing Type					
Refrigerant Type		R32					
Max Pipe Length	(m)	20	20	20	30	30	30
Max Level Difference	(m)	15	15	15	20	20	20
Pipe Sizes	Liquid (mm) Gas (mm) Cool (°CDB) Heat (°CWB)	6.4 9.5 -10 to 46	6.4 9.5 -10 to 46	6.4 9.5 -10 to 46	6.4 12.7 -15 to 18	6.4 12.7 -15 to 18	6.4 12.7 -15 to 18
Outdoor Operating Range							
Indoor Sound Level (H/SL)	Cool (dBA) Heat (dBA)	39/19 39/20	40/19 40/20	42/19 42/20	44/28 44/28	45/28 46/29	49/30 49/30
Outdoor Sound Level (H/SL)	Cool (dBA) Heat (dBA)	47/43 48/44	47/43 48/44	48/44 49/45	47/44 50/46	47/44 50/46	53/47 54/49
Outdoor EPA Sound Power Level (H)	Cool (dBA) Heat (dBA)	59 60	59 60	59 61	59 62	61 62	65 66

- Lite Series Notes (Page 8):
- The Rated Capacity, Power Input and Running Current are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1.
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
Indoor and outdoor unit sound levels are determined in an anechoic chamber at a distance of 1 metre from the front of the unit.
They are normally higher during actual operation due to ambient conditions.
 - Multi Lite Notes (Page 9):
The Rated Capacity, Power Input and Running Current are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1.
Cooling: Indoor temp: 27°CDB/19°CWB, Outdoor temp: 35°CDB/24°CWB
Heating: Indoor temp: 20°CDB/15°CWB, Outdoor temp: 7°CDB/6°CWB
Indoor and outdoor unit sound levels are determined in an anechoic chamber at a distance of 1 metre from the front of the unit.
They are normally higher during actual operation due to ambient conditions.

INDOOR UNIT	CTXF620TUMA	CTXF625TUMA	CTXF635TUMA	CTXF650TUMA
Power Supply		1 Phase, 220-240V, 50Hz		
Capacity	Cool/Heat (kW)	2.0	2.5	3.5
Front Panel Colour		Pure White		
Airflow Rate (H)	Cool (l/s) Heat (l/s)	167 133	177 200	312 327
Sound Level (H/SL)	Cool (dBA) Heat (dBA)	40/27/19 40/28/20	42/28/19 42/29/20	45/35/28 45/33/28
Sound Power Level (H)	Cool (dBA) Heat (dBA)	54 54	56 56	59 59
Fan Speed		5 steps, quiet and automatic		
Dimensions (HxWxD)	(mm)	285x770x223		
Machine Weight	(kg)	9		
Piping Connections	Liquid (mm) Gas (mm) Drain (mm)	6.4 (Flared) 9.5 (Flared) 16		



OUTDOOR UNIT		2MXF70TUMA	
Power Supply		1 Phase, 220-240V, 50Hz	
Rated Capacity	Cool (kW)	7.0	
	Heat (kW)	7.0	
Max Connectable Indoor Units		2	
Max Connected Indoor Unit Capacity	(kW)	7.5	
Casing Colour		Ivory White	
Compressor Type		Hermetically Sealed Swing Type	
Refrigerant Type		R32	
Sound Level (Rated/Quiet)	Cool (dBA)	51/46	
	Heat (dBA)	53/46	
Sound Power Level (H)	Cool (dBA)	63	
	Heat (dBA)	65	
Dimensions (HxWxD)	(mm)	595x845x300	
Weight	(kg)	47	
Operation Range	Cool (°CDB)	10 to 46	
	Heat (°CWB)	-15 to 18	
Max Piping Length	Total (m)	30	
	Per Room (m)	25	
Additional Charge	(g/m)	20 (for 20m or more)	
Max Installation Height Difference	(m)	15 (between indoor and outdoor units) / 7.5 (between indoor units)	

FEATURES
CHECKLIST

Notes

	WALL MOUNTED UNIT	
	LITE SERIES	MULTI LITE
Reverse Cycle Cycle (Heating & Cooling)	FTXF501VMA FTXF501VMA FTXF501VMA FTXF501VMA FTXF501VMA FTXF501VMA FTXF501VMA	CTXF501VMA CTXF501VMA CTXF501VMA CTXF501VMA CTXF501VMA CTXF501VMA CTXF501VMA
DC Inverter	✓	✓
PAM Control	✓	✓
Standby Power Function	✓	✓
Power-Airflow Flaps	✓ ¹	✓ ¹
Power-Airflow Dual Flaps	✓ ²	✓ ²
Vertical Auto-Swing (up and down)	✓	✓
Horizontal Auto-Swing (right and left)		
3-D Airflow		
Vertical Airflow		
Circulation Airflow		
Breeze Airflow		
Comfortable Airflow	✓	✓
Indoor Unit Quiet Operation	✓	✓
Outdoor Unit Quiet Operation	✓	✓
Intelligent Eye		
2-Area Intelligent Eye		
New 2-Area Intelligent Eye		
Grid Eye Sensor		
Automatic Operation	✓ ³	✓ ³
Program Dry Function	✓	✓
Auto Fan Speed	✓	✓
Hot Start	✓ ³	✓ ³
Titanium Apatite Deodorising Filter	✓ ⁴	✓ ⁴
Air-Purifying Filter	✓	✓
Flash Streamer Technology		
Econo Mode	✓	✓
Radiant Mode		
Powerful Operation	✓	✓
LCD Wireless Remote Control	✓	✓
Indoor Unit On/Off Switch	✓	✓
24-Hour On/Off Timer		
Countdown On/Off Timer	✓	✓
Quick Heating Timer		
Weekly Timer		
Night Set Mode	✓	✓
Auto-Restart after Power Failure	✓	✓
Self Diagnosis with Digital Display	✓	✓

1 Only available for FTXF20-501VMA & CTXF20-351VMA
2 Only available for FTXF60-711VMA & CTXF501VMA
3 Only available for Reverse Cycle Models
4 Optional Accessory
5 Optional Accessory, Remote Control PCB also required
BPP067442 for FTXF20-501VMA & CTXF20-351VMA
BPP580542 for FTXF60-711VMA & CTXF501VMA

The specifications, designs and information in this brochure are subject to change without notice. Unit colours shown are as close as possible to actual unit colours. Colours depicted in this brochure may vary slightly.

ASSUMPTIONS

All representations made in Daikin marketing and promotional material are based on the assumptions that the correct equipment has been selected, appropriately sized and installed in accordance with Daikin's installation instructions and standard industry practices.

QUALITY CERTIFICATIONS

Daikin Industries Limited was the first air conditioning equipment manufacturer in Japan to receive ISO 9001 certification. All Daikin manufacturing facilities have been certified to ISO 9001 Quality Management System requirements. ISO 9001 is a certificate for quality assurance concerning 'design, development, manufacturing, installation and related service' of products manufactured at that factory.

ENVIRONMENTAL CERTIFICATIONS

Daikin Industries Limited has received ISO 14001 Environmental Certification for the Daikin production facilities listed below. ISO 14001 is an international standard specifying requirement for an environmental management system, enabling an organisation to formulate policy and objectives, taking into account legislative requirements and information about significant environmental impacts. It applies to those environmental aspects within the organisation's control and over which it can be expected to have an influence.

The certification relates only to the environmental management system and does not constitute any endorsement of the products shipped from the facility by the International Organisation for Standardisation.

Head Office /Tokyo Office
Shiga Plant (Japan)
Sakai Plant (Japan)
Daikin Industries Ltd (Thailand)
Yodogawa Plant (Japan)
Daikin Australia Pty. Ltd.

Certificate number: EC02J0355
Certificate number: EC99J2044
Certificate number: JOA-E-80009
Certificate number: JOA-E-90108
Certificate number: EC99J2057
Certificate number: CEM20437

Daikin Australia Pty Limited (ISO 9001)

OEC 23256 May 12, 2006
Sydney, Brisbane, Adelaide,
Melbourne, Newcastle,
Townsville, Perth



Daikin Australia Pty Limited (ISO 14001)

CEM 20437 October 27, 2006
Sydney, Brisbane, Adelaide,
Melbourne, Perth



Residential Air Conditioning Manufacturing Div (ISO 9001)

JOA-0486 May 2, 1994
(Shiga Plant)

Commercial Air Conditioning and Refrigeration Manufacturing Div (ISO 9001)

JMI0107 December 28, 1992
(Kanaoka Factory and Rinkai
Factory at Sakai Plant)

Industrial System and Chiller Products Manufacturing Div (ISO 9001)

JOA-0495 May 16, 1994
(Yodogawa Plant and Kanaoka
Factory and Kishiwada Factory)

Daikin Europe N.V (ISO 9001)

Lloyd 928589.1 June 2, 1993

Daikin Industries (Thailand) Ltd
JOA-1452 September 13, 2002
(ISO 9001)



CONTACT:



Daikin Australia Pty Limited ABN 62 000 172 967
For Sales enquiries, email sales@daikin.com.au
For Customer Service or Technical Support, call **1300 362 438**

Stay Connected!     
Visit commercial.daikin.com.au